

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
2 June 2005 (02.06.2005)

PCT

(10) International Publication Number
WO 2005/050045 A1

(51) International Patent Classification⁷: **F16D 7/08**

(21) International Application Number:
PCT/IT2003/000752

(22) International Filing Date:
19 November 2003 (19.11.2003)

(25) Filing Language: Italian

(26) Publication Language: English

(71) Applicant (for all designated States except US): **STRADA S.R.L.** [IT/IT]; Strada Fontaneto, Reg. Gioncheto, I-10023 Chieri (IT).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **STRADA, Vito** [IT/IT]; Via Buttigliera, 17, I-10023 Chieri (IT).


(74) Agents: **SPANDONARI, Carlo et al.**; Spandonari & Modiano S.r.l., Corso Duca degli Abruzzi, 16, I-10129 Torino (IT).

(81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: **CLUTCH, PARTICULARLY FOR MOTORCYCLES**

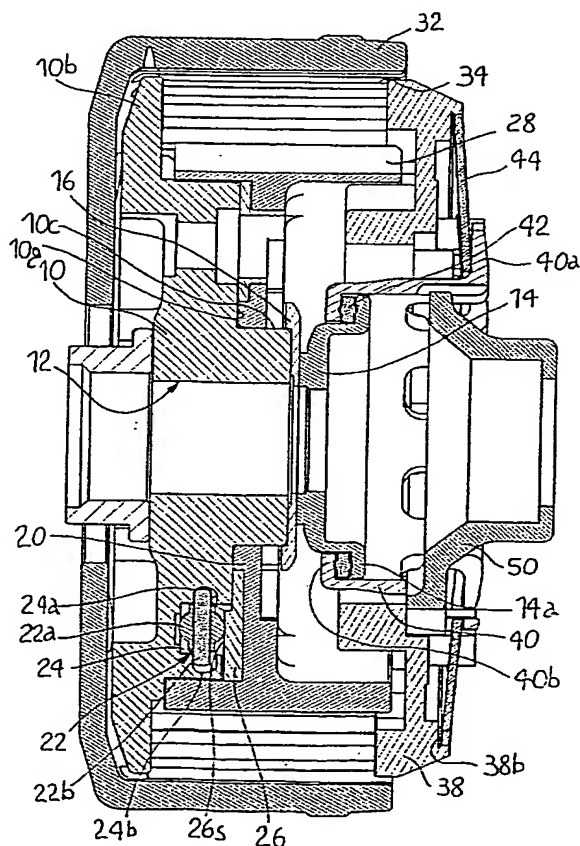

(57) Abstract: A clutch for vehicles comprises a driving member (10) and a driven member (22) coaxial to the driving member, with a pack of clutch plates between them which are alternatively connected to the driving member and to the driven member, a pressure member (38) engaged by elastic means (44) to push the clutch plates against a ledge (10b) of the driven member, a floating member (20) that is axially translatable between the driven member (10) and the pressure member (38), and driving means (22, 24, 26) on said driving member and floating member which are in mutual, rotary and shifting engagement to axially push the floating member (20) against the pressure member in contrast to said elastic means. The driving means comprises rollers (22) each pivotally supported by the driving member (10) about a substantially radial axis to engage respective inclines (26s) that are frontally made on the floating member.



SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— with international search report